


# 深圳市晶泰源电子有限公司

**TIP120,121,122** Darlington TRANSISTOR (NPN)

**TIP125,126,127** Darlington TRANSISTOR (PNP)

## FEATURES

Medium Power Complementary silicon transistors

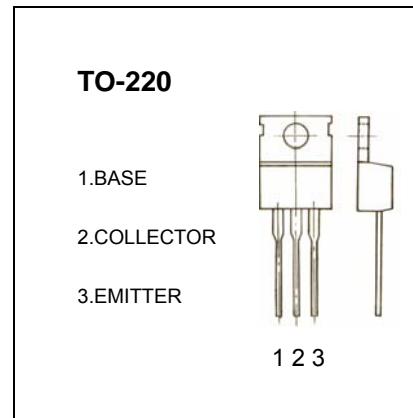

## MAXIMUM RATINGS ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	TIP120 TIP125	TIP121 TIP126	TIP122 TIP127	Units
$V_{CBO}$	Collector-Base Voltage	60	80	100	V
$V_{CEO}$	Collector-Emitter Voltage	60	80	100	V
$V_{EBO}$	Emitter-Base Voltage		5		V
$I_C$	Collector Current -Continuous		5		A
$P_C$	Collector Power Dissipation		2		W
$R_{\theta JA}$	Thermal Resistance Junction to Ambient		62.5		$^\circ\text{C}/\text{W}$
$R_{\theta JC}$	Thermal Resistance Junction to Case		1.92		$^\circ\text{C}/\text{W}$
$T_J$	Junction Temperature		150		$^\circ\text{C}$
$T_{stg}$	Storage Temperature		-55 to +150		$^\circ\text{C}$

## ELECTRICAL CHARACTERISTICS (Tamb=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Collector-base breakdown voltage <b>TIP120,TIP125 TIP121,TIP126 TIP122,TIP127</b>	$V(\text{BR})_{\text{CBO}}$	$I_C=1\text{mA}, I_E=0$	60 80 100		V
Collector-emitter breakdown voltage <b>TIP120,TIP125 TIP121,TIP126 TIP122,TIP127</b>	$V_{\text{CEO}}(\text{SUS})$	$I_C=30\text{mA}, I_B=0$	60 80 100		V
Collector cut-off current <b>TIP120,TIP125 TIP121,TIP126 TIP122,TIP127</b>	$I_{\text{CBO}}$	$V_{\text{CB}}=60\text{ V}, I_E=0$ $V_{\text{CB}}=80\text{ V}, I_E=0$ $V_{\text{CB}}=100\text{V}, I_E=0$		0.2	mA
Collector cut-off current <b>TIP120,TIP125 TIP121,TIP126 TIP122,TIP127</b>	$I_{\text{CEO}}$	$V_{\text{CE}}=30\text{ V}, I_B=0$ $V_{\text{CE}}=40\text{ V}, I_B=0$ $V_{\text{CE}}=50\text{ V}, I_B=0$		0.5	mA
Emitter cut-off current	$I_{\text{EBO}}$	$V_{\text{EB}}=5\text{ V}, I_C=0$		2	mA
DC current gain	$h_{\text{FE}(1)}$	$V_{\text{CE}}=3\text{V}, I_C=0.5\text{A}$	1000		
	$h_{\text{FE}(2)}$	$V_{\text{CE}}=3\text{V}, I_C=3\text{ A}$	1000		
Collector-emitter saturation voltage	$V_{\text{CE}}(\text{sat})$	$I_C=3\text{A}, I_B=12\text{mA}$ $I_C=5\text{ A}, I_B=20\text{mA}$		2 4	V
Base-emitter voltage	$V_{\text{BE}}$	$V_{\text{CE}}=3\text{V}, I_C=3\text{ A}$		2.5	V
Output Capacitance	Cob	$V_{\text{CB}}=10\text{V}, I_E=0, f=0.1\text{MHz}$		300 200	pF