

深圳市晶泰源电子有限公司

WL78L06 Three-terminal positive voltage regulator

FEATURES

Maximum Output current


I_{OM} : 0.1 A

Output voltage

V_o : 6 V

Continuous total dissipation

P_D : 0.625W

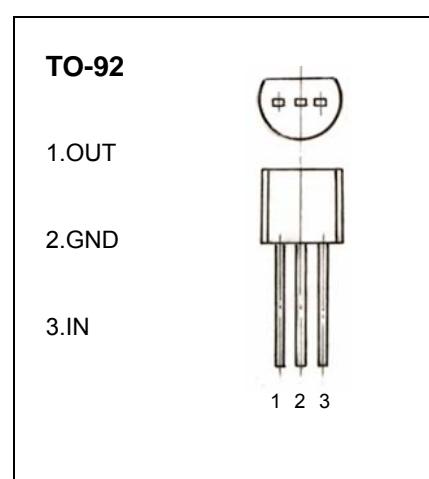


ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Units
Input Voltage	V_I	30	V
Operating Junction Temperature Range	T_{OPR}	0-+125	°C
Storage Temperature Range	T_{STG}	-55-+150	°C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_i=11V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_o	25°C	5.75	6.0	6.25	V
		8V≤ V_o ≤20V, $I_o=1mA-40mA$	5.7	6.0	6.3	V
		$I_o=1mA-70mA$	5.7	6.0	6.3	V
Load Regulation	ΔV_o	$I_o=1mA-100mA$	25°C	16	80	mV
		$I_o=1mA-40mA$	25°C	9	40	mV
Line regulation	ΔV_o	8V≤ V_o ≤20V	25°C	35	175	mV
		9V≤ V_o ≤20V	25°C	29	125	mV
Quiescent Current	I_q		25°C	3.9	6.0	mA
Quiescent Current Change	ΔI_q	9V≤ V_o ≤20V	0-125°C		1.5	mA
	ΔI_q	1mA≤ I_o ≤40mA	0-125°C		0.1	mA
Output Noise Voltage	V_N	10Hz≤f≤100KHz	25°C	46		uV
Ripple Rejection	RR	9V≤ V_o ≤19V, f=120Hz	0-125°C	40	48	dB
Dropout Voltage	V_d		25°C	1.7		V

TYPICAL APPLICATION

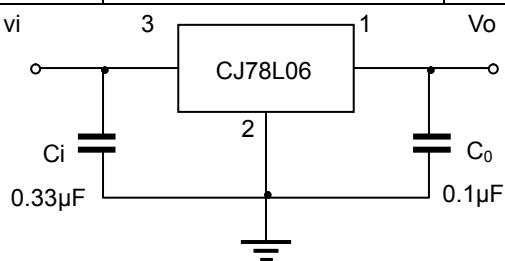

Note : Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.