

# 深圳市晶泰源电子有限公司

## CJ79L12 Three-terminal negative voltage regulator

### FEATURES

Maximum Output current


$I_{OM}$ : 0.1 A

Output voltage

$V_o$ : -12 V

Continuous total dissipation

$P_D$ : 0.625 W

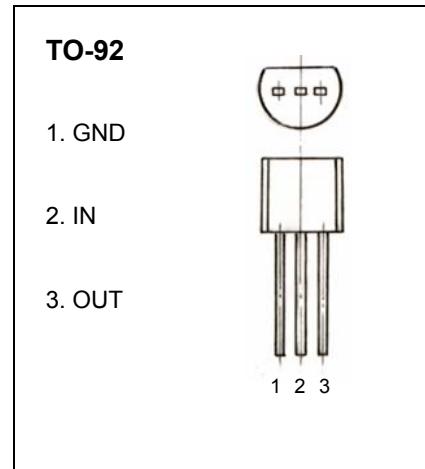


### ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Units
Input Voltage	$V_I$	-35	V
Operating Junction Temperature Range	$T_{OPR}$	0~+125	°C
Storage Temperature Range	$T_{STG}$	-55~+150	°C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ( $V_i=19V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	$V_o$	25°C	-11.5	-12	-12.5	V
		-14.5V≤ $V_o$ ≤-27V, $I_o=1mA~40mA$	-11.4	-12	-12.6	V
		$I_o=1mA~70mA$	-11.4	-12	-12.6	V
Load Regulation	$\Delta V_o$	$I_o=1mA~100mA$	25°C	24	100	mV
		$I_o=1mA~40mA$	25°C	15	50	mV
Line regulation	$\Delta V_o$	-14.5V≤ $V_o$ ≤-27V	25°C	50	250	mV
		-16V≤ $V_o$ ≤-27V	25°C	40	200	mV
Quiescent Current	$I_q$	25°C		6.5		mA
Quiescent Current Change	$\Delta I_q$	-16V≤ $V_o$ ≤-27V	0-125°C		1.5	mA
	$\Delta I_q$	1mA≤ $I_q$ ≤40mA	0-125°C		0.1	mA
Output Noise Voltage	$V_N$	10Hz≤f≤100KHz	25°C	80		uV
Ripple Rejection	$RR$	-15V≤ $V_o$ ≤-25V, f=120Hz	0-125°C	37	42	dB
Dropout Voltage	$V_d$		25°C	1.7		V

### TYPICAL APPLICATION

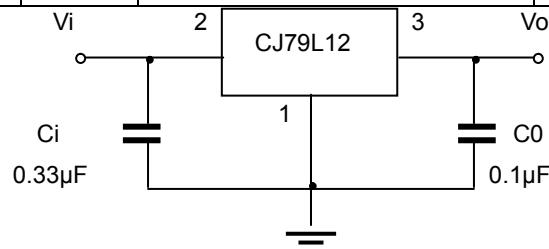

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

## Typical Characteristics

CJ79LXX

