

# 深圳市晶泰源电子有限公司

**7808** Three-terminal positive voltage regulator

## FEATURES

Maximum Output current  $I_{OM}$ : 1.5 A

Output voltage  $V_o$ : 8 V

Continuous total dissipation

$P_D$ : 1.5 W ( $T_a = 25^\circ C$ )


15W ( $T_c=25^\circ C$ )

## TO-220

1. IN

2. GND

3. OUT



1 2 3


## ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	$V_i$	35	V
Thermal resistance junction-air	$R_{\theta JA}$	65	°C/W
Thermal resistance junction-cases	$R_{\theta JC}$	5	°C/W
Operating Junction Temperature Range	$T_{OPR}$	0-125	°C
Storage Temperature Range	$T_{STG}$	-65-150	°C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ( $V_i=14V, I_o=500mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )







Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	$V_o$	25°C	7.7	8	8.3	V
		10.5V≤ $V_i$ ≤23V, $I_o=5mA-1A, P\leq 15W$	0-125°C	7.6	8	8.4
Load Regulation	$\Delta V_o$	$I_o=5mA-1.5A$	25°C		12	mV
		$I_o=250mA-750mA$	25°C		4	mV
Line regulation	$\Delta V_o$	10.5V≤ $V_i$ ≤25V	25°C		6	mV
		11V≤ $V_i$ ≤17V	25°C		2	mV
Quiescent Current	$I_q$		25°C		4.3	mA
Quiescent Current Change	$\Delta I_q$	10.5V≤ $V_i$ ≤25V	0-125°C		1	mA
		5mA≤ $I_o$ ≤1A	0-125°C		0.5	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o=5mA$	0-125°C		-0.8	mV/°C
Output Noise Voltage	$V_N$	10Hz≤f≤100KHz	25°C		52	uV
Ripple Rejection	RR	11.5V≤ $V_i$ ≤21.5V, f=120Hz	0-125°C	55	72	dB
Dropout Voltage	$V_d$	$I_o=1A$	25°C		2	V
Output resistance	$R_o$	f=1KHz	25°C		10	mΩ
Short Circuit Current	$I_{sc}$		25°C		450	mA
Peak Current	$I_{pk}$		25°C		2.2	A

## TYPICAL APPLICATION

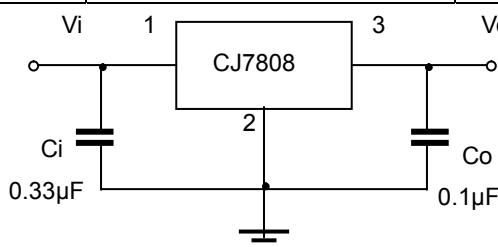

## Typical Characteristics

CJ78XX

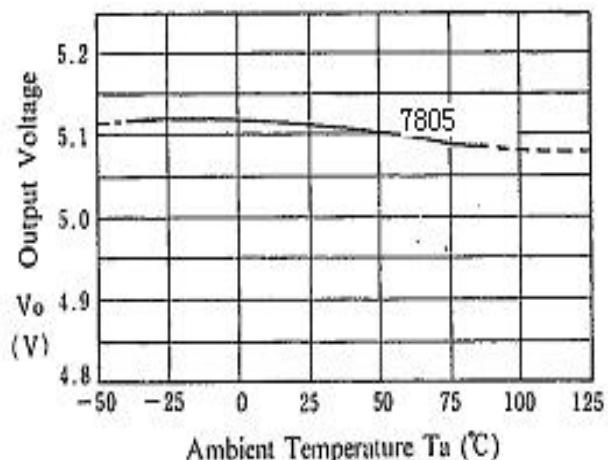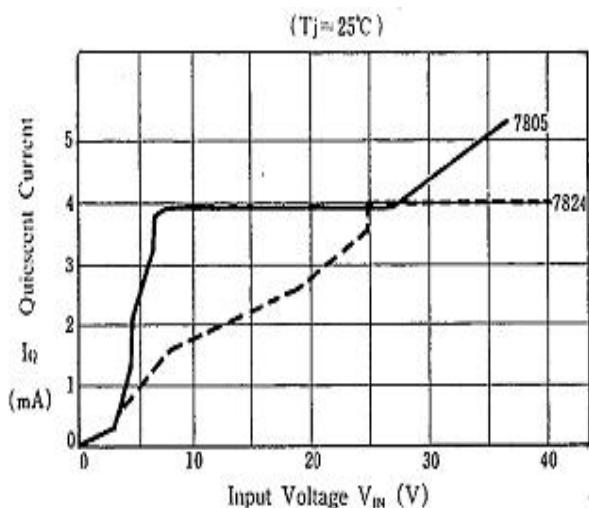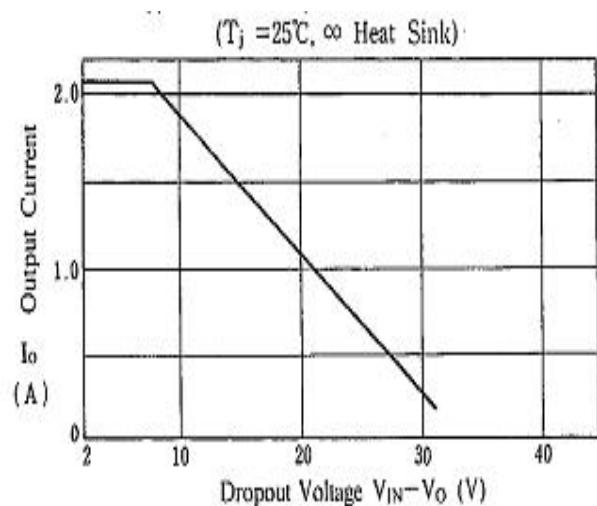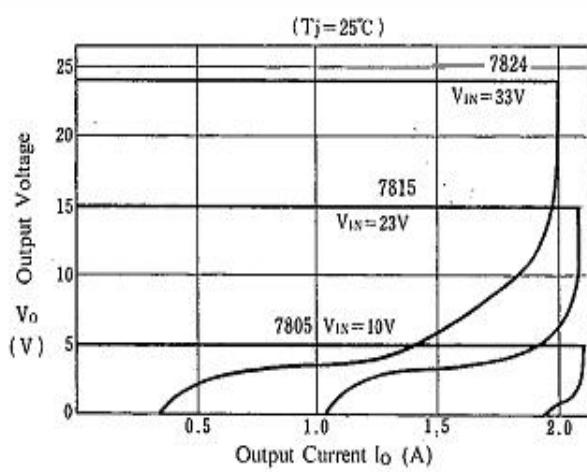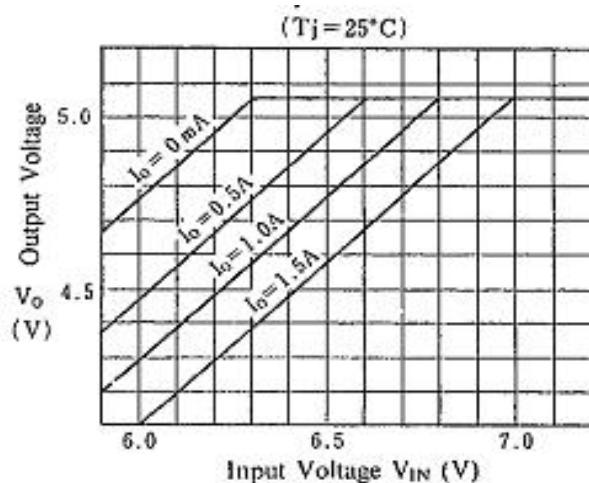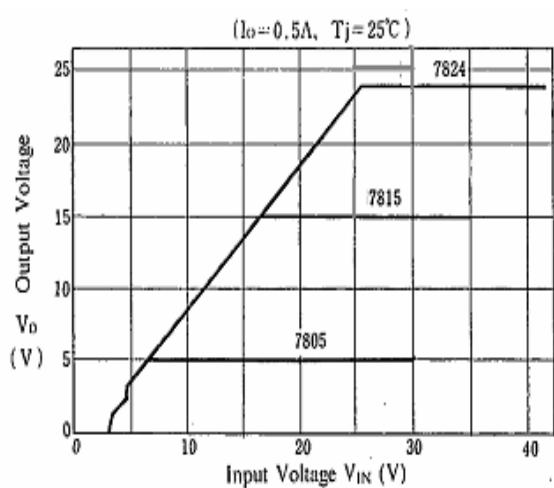

### PD-TA

